

(19) World Intellectual Property Organization
International Bureau



DocId: PCT/PTO 15 SEP 2004

(43) International Publication Date
2 October 2003 (02.10.2003)

PCT

(10) International Publication Number
WO 03/081931 A1

(51) International Patent Classification: H04Q 7/38,
H04B 7/26, 7/212

(21) International Application Number: PCT/EP03/03057

(22) International Filing Date: 24 March 2003 (24.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02252254.4 27 March 2002 (27.03.2002) EP
60/370,636 8 April 2002 (08.04.2002) US

(71) Applicant (for all designated States except US): TELE-
FONAKTIEBOLAGET L M ERICSSON (publ)
[SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): PALENIUS, Torgny

[SE/SE]; Svalörtvägen 10, S-246 50 Löddeköpinge (SE).
ÖSTBERG, Christer [SE/SE]; Björkvägen 8, S-245 44
Staffanstorps (SE).


(74) Agent: O'CONNELL, David, Christopher; Haseltine
Lake, Imperial House, 15-19 Kingsway, London WC2B
6UD (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: CONTROL OF FRAME TIMING ON HANDOVER

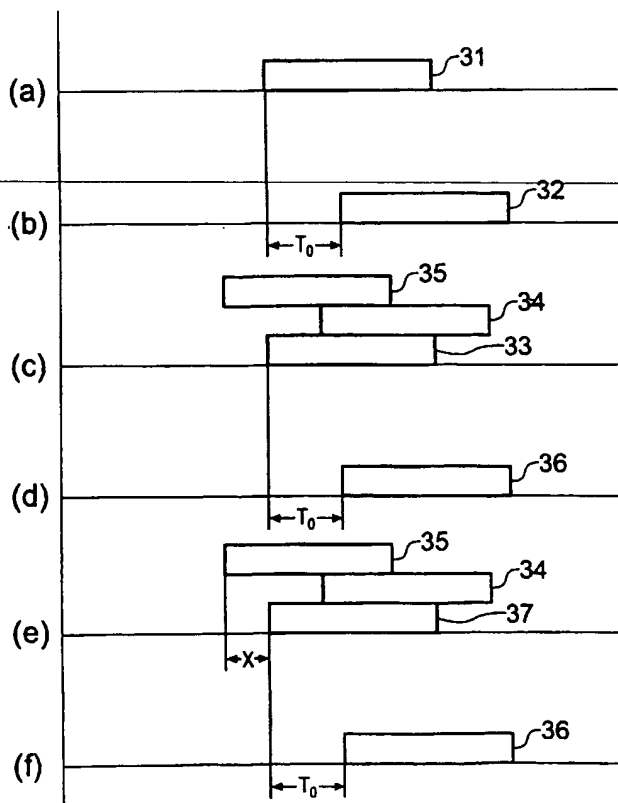

(57) Abstract: The uplink transmission timing from a mobile communications device is defined with reference to the downlink reception timing of signals from a particular reference cell. When that reference cell is removed from the active set, there is defined a virtual reference cell, the timing of which is defined with reference to one or more of the cells remaining in the active set, such that the timing of this new virtual reference cell corresponds to the timing of the previous reference cell. The timing of the uplink transmission from the user equipment are then defined with reference to the new virtual reference cell, in the conventional way. This has the advantage that, following a soft handover, it is not necessary to adjust the timing of uplink transmissions from the user equipment.

BEST AVAILABLE COPY

WO 03/081931 A1

WO 03/081931 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

DT04 Rec'd PCT/PTO 1 5 SEP 2004

CONTROL OF FRAME TIMING ON HANDOVERTechnical Field of the Invention

5 This invention relates to a mobile communications system, and in particular to a method of controlling the timing of frames defined for data receipt and transmission in a mobile communications device. Other aspects of the invention relate to the mobile
10 communications device itself, and to the network which implements the method.

BACKGROUND OF THE INVENTION

15 In the proposed Universal Mobile Telephony System (UMTS), defined by the standards published by the 3rd Generation Partnership Project (3GPP), a mobile device, or user element UE, can establish links with several cells in the cellular radio network.

20

The data received by the user equipment from each of the cells is transmitted in frames on respective
~~downlink channels. The frames in the respective~~
downlink channels are not synchronized with each other.

25 Moreover, because of possible movement of the user equipment relative to the base stations in the different cells, the timing of each downlink frame, relative to the other received downlink frames, can change.

30

The user equipment transmits data in frames on uplink channels to the base stations in the cells with which the user equipment has links. Thus, there is defined for the user equipment a transmission frame timing,
35 which is common to all of the uplink channels. This

transmission frame timing is defined with reference to the downlink frame timing of one of the active links.

Thus, in the Technical Specification 3GPP TS 25.133
5 v3.8.0, section 7, and the associated test case at section A.7, there is described a method for defining the timing of the uplink transmission frame. Specifically, in the case where there is a single active link, the uplink frame transmission takes place
10 a time T_0 ($=1,024$ chips) after the reception of the first detected path of the corresponding downlink frame.

When the user equipment has one active link with a
15 cell, its transmission frame timing is set with reference to the downlink frame timing of that cell, and the transmission frame timing is still defined with reference to the downlink frame timing of that first cell, even when a second cell is added to the active
20 set. However, in that case, when the first cell is removed from the active set, the uplink transmit timing is adjusted, at a defined adjustment rate, until the uplink frame transmission takes place T_0 ($=1,024$ chips)
after the reception of the first detected path of the
25 downlink frame from the remaining active link.

Thus, according to the published Technical Specification, there is defined a reference cell, that is the cell with reference to which the uplink frame
30 transmission is defined. When there are two active links, and the reference cell is removed from the active set, the remaining cell becomes the reference cell.

35 However, this does not indicate how the uplink frame transmission should be defined in the event of a soft

handover, when there are more than two active links,
and the reference cell is removed from the active set.

5 SUMMARY OF THE INVENTION

According to the published Technical Specification,
discussed above, the uplink transmission timing is
defined with reference to the downlink reception timing
10 of signals from a particular reference cell. When that
reference cell is removed from the active set, the
Technical Specification envisages that another cell
from the active set be defined as the new reference
cell, and that the uplink transmission timing should be
15 adjusted so that it is defined with reference to the
downlink reception timing from the new reference cell.

However, large adjustments are undesirable, since they
can have the effect that another active cell must be
20 removed from the active set, because its transmissions
no longer fall within the receiver window of the user
equipment. On the other hand, choosing a new reference
cell simply because it would require the smallest
adjustment may also be undesirable because, if that
25 cell were itself to be removed from the active set, it
would then be necessary to choose another new reference
cell.

According to the present invention, therefore, there is
30 defined a virtual reference cell, the timing of which
is defined with reference to one or more of the cells
remaining in the active set, such that the timing of
this new virtual reference cell corresponds to the
timing of the previous reference cell. The timing of
35 the uplink transmissions from the user equipment are

then defined with reference to the new virtual reference cell, in the conventional way.

This has the advantage that, following a soft handover,
5 it is not necessary to adjust the timing of uplink transmissions from the user equipment.

The virtual reference cell may be defined with reference to the active cell which first joined the
10 active set, the cell whose downlink transmission timing most closely corresponds to the downlink transmission timing of the previous reference cell, or the cell from which the strongest signal is being received, or may be defined with reference to the average timing of all of
15 the cells in the active set.

According to another aspect of the present invention, there is provided user equipment which is able to define a virtual reference cell as described above,
20 following a soft handover.

It should be emphasised that the term "comprises/comprising" when used in this specification
is taken to specify the presence of stated features,
25 integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

BRIEF DESCRIPTION OF DRAWINGS

30

Figure 1 is a schematic representation of a part of a mobile communications network in accordance with an aspect of the invention.

Figure 2 is a block schematic diagram of a mobile communications device in accordance with an aspect of the invention.

- 5 Figure 3 is a timing diagram showing the relationship between uplink and downlink frame timing in accordance with the invention.

Figure 4 is a flow chart illustrating a method in
10 accordance with an aspect of the invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 1 illustrates a part of a mobile communications
15 network in accordance with the present invention. Specifically, Figure 1 shows a user equipment (UE) 10, which is moveable within a network of base station systems (BSS) 12, 14, 16, 18. The base station systems (BSS) 12, 14, 16, 18 have respective overlapping
20 coverage areas, or cells. It will be obvious that the network contains more base station systems than the four shown in figure 1. Each of the base station systems 12, 14, 16, 18 has a respective connection (not
shown in Figure 1) to a data communications network.

25

The invention is described herein with reference to the Universal Mobile Telephony Service (UMTS), as defined by the 3rd Generation Partnership Project (3GPP).

- 30 In such a system, the user equipment 10 may have active radio links with more than one base station system. The base station systems with which the user equipment has active radio links are defined as the active set. In use, for example as the user equipment moves further
35 from or nearer to particular base station systems, some radio links may be lost, and new radio links may be set

up. This process of changing the membership of the active set is known as soft handover.

Figure 2 is a schematic diagram of the relevant parts of the user equipment 10. It will be apparent that the user equipment 10 has many other features and functions which are not described herein, as they are not essential for an understanding of the present invention. The user equipment 10 takes the form of portable radio communication equipment, which may for example be a mobile telephone, or personal digital assistant (PDA) with wireless communication facility. The UE 10 has an antenna 22, which receives and transmits signals over the air interface to one or more of the base station systems in the network. Received signals are passed to transceiver (TRX) circuitry 24, and then to a processor 26. Conversely, signals for transmission are passed from the processor 26 to the transceiver circuitry 24, and then to the antenna 22.

20

The processor 26 is responsible for separating the wanted signals out from all of the received radio signals, and is also responsible for receiving the data which is to be transmitted, and converting it into a form which is suitable for transmission over the air interface.

Figure 3 is a timing diagram, in which Figures 3(a) and 3(b) show the situation when the user equipment 10 has one active radio link. In that case, the user equipment sets the timing of a downlink frame 31, namely the frame timing of the detected downlink signals on the active radio link.

Figure 3(b) shows the uplink frame transmission timing. As is conventional, the uplink frame 32 begins T_0

(=1,024 chips) after the reception of the first detected path of the corresponding downlink frame 31.

In use, for example as the user equipment moves
5 relative to the base station with which it has the active radio link, it may be necessary to adjust the frame timings from one frame to the next.

The start of the downlink frame 31 can be referred to
10 as the received radio link timing, and this also defines a receiver window, which extends a fixed time (=148 chips) before and after the received radio link timing. Other radio links are only permitted if their
15 respective received radio link timings are within this receiver window.

Figure 3(c) shows the situation when the user equipment has three radio links. The signals received on the three downlink channels are received at different
20 times, the respective downlink frame timings being illustrated by the reference numerals 33, 34, 35. Figure 3(c) shows the relative timings of the three windows at one particular instant. However, as before,
movement of the user equipment relative to the base
25 stations can mean that these relative timings change in use.

As described above with reference to Figure 3(b), the transmit frame 36 is defined with reference to one of
30 the reception frames. In this case, the cell which has the downlink frame timing 33 is defined as the reference cell, and the transmitted frame 36 is set to start T_0 (=1,024 chips) after the start of the received frame 33, as shown in Figure 3(d).

35

Also, the receiver window, within which the received frames of other active radio links must lie, is defined with reference to the start of the received frame 33.

5 Figure 4 is a flow chart illustrating a method in accordance with the invention, and Figures 3(e) and 3(f) show the relative frame timings which are obtained. In step 41 of the process, it is determined within the user equipment whether the reference cell
10 has been removed from the active set for that user equipment. If it has not, there is no change, and the process returns to the start. However, if the reference cell has been removed from the active set then, in accordance with the present invention, a new
15 virtual reference cell is defined.

Thus, in order to avoid the need to select a new reference cell from the remaining cells of the active set, and therefore the need to adjust the transmission
20 frame timing and the timing of the receiver window, a virtual reference cell is defined. The virtual reference cell is a cell which is not used for reception or transmission of signals over the air
interface, but which is used in determining the timing
25 of transmissions. Specifically, as shown in Figure 3(e), the virtual reference cell has a frame timing 37 which corresponds exactly to the receiver frame timing 33 of the previous reference cell.

30 The timing of the virtual reference cell receiver frame 37 is defined with reference to one of the remaining cells. In the case illustrated in Figure 3(e), the receiver frame timing 37 of the virtual reference cell is defined as being a time X after the receiver frame
35 timing 35 of one of the remaining cells. This remaining cell could be chosen because it has the

strongest signal, or because it is the earliest received signal, or because it is the cell which is closest in time to the original reference cell. As an alternative, the timing of the new virtual reference
5 cell could be determined relative to the average timing of the remaining cells.

Then, as shown in Figure 3(f), the transmit frame 36 is defined with reference to the virtual reference cell
10 reception frame 37. Because the virtual reference cell is chosen to have a timing which is the same as the previous reference cell, it is not necessary to make large adjustments to the timing of the transmission
15 frame 36. This means that the transmission frame timing does not need to be adjusted, and therefore that the quality of the modulated signal received in the base station systems will be improved. It further means that the receiver window does not need to be
20 adjusted, and therefore that there is no risk that useful radio links need to be removed from the active set because they no longer fall within the receiver window.

Of course, it should be noted that it remains possible
25 to make adjustments to the frame timings, for example because of frequency errors between the base station and the user equipment, or in order to compensate for movement of the user equipment relative to the base stations, but these adjustments are relatively small.

30
Once a virtual reference cell has been defined then, in step 43 of the process shown in Figure 4, it is tested whether the remaining cell, namely the cell with reference to which the virtual reference cell is
35 defined, has been removed from the active set. Provided that the remaining cell remains in the active

set, no action is necessary. However, in the event that that remaining cell is removed from the active set, it is necessary to redefine the timing of the virtual reference cell, for example with reference to
5 one of the other remaining cells, or with reference to the average timing of all of the remaining cells.

There is therefore described a system for defining a transmission frame timing in the event of a soft
10 handover, without interrupting existing transmissions.

As described above, the system is used when the soft handover removes a cell from the active set and a plurality of cells remain in the active set. However,
15 the system in accordance with the invention can also be used by defining a virtual reference cell when one or more cells are removed from the active set and only one cell remains in the active set.

CLAIMS

1. A method of defining an uplink transmission frame timing, for use in a mobile communications system in which a user equipment may have radio links with a plurality of cells, and in which the cells with which the user equipment has radio links define an active set, wherein the uplink transmission frame timing is defined with reference to the downlink transmission frame timing of a reference cell selected from said active set,

the method comprising:

when the reference cell is removed from the active set, defining a virtual reference cell, the timing of which is defined with reference to one or more of the cells remaining in the active set, such that the timing of the virtual reference cell corresponds to the timing of the previous reference cell; and

defining the uplink transmission frame timing relative to the timing of the virtual reference cell.

2. A method as claimed in claim 1, wherein the uplink transmission frame timing is defined to be a fixed time after the virtual reference cell timing.

25

3. A method as claimed in claim 2, for use in UMTS, wherein the uplink transmission frame timing is defined to be T_0 (=1,024 chips) after the virtual reference cell timing.

30

4. A method as claimed in claim 1, wherein the virtual reference cell timing is defined with reference to the active cell which first joined the active set.

35

5. A method as claimed in claim 1, wherein the virtual reference cell timing is defined with reference

to the active cell whose downlink transmission timing most closely corresponds to the downlink transmission timing of the previous reference cell.

5 6. A method as claimed in claim 1, wherein the virtual reference cell timing is defined with reference to the active cell from which the strongest signal is being received.

10 7. A method as claimed in claim 1, wherein the virtual reference cell timing is defined with reference to the average timing of all of the cells in the active set.

15 8. A mobile communications device, for use in a mobile communications system in which a mobile communications device may have radio links with a plurality of cells, and in which the cells with which the device has radio links define an active set,
20 wherein the device comprises means for defining an uplink transmission frame timing with reference to the downlink transmission frame timing of a reference cell selected from said active set, and

 wherein the device is adapted, when the reference
25 cell is removed from the active set, to:
 define a virtual reference cell, the timing of which is defined with reference to one or more of the cells remaining in the active set, such that the timing of the virtual reference cell corresponds to the timing
30 of the previous reference cell; and to
 define the uplink transmission frame timing relative to the timing of the virtual reference cell.

 9. A mobile communications device as claimed in
35 claim 8, wherein the uplink transmission frame timing

is defined to be a fixed time after the virtual reference cell timing.

10. A mobile communications device as claimed in
5 claim 8, for use in UMTS, wherein the uplink transmission frame timing is defined to be T_0 (=1,024 chips) after the virtual reference cell timing.

11. A mobile communications device as claimed in
10 claim 8, wherein the virtual reference cell timing is defined with reference to the active cell which first joined the active set.

12. A mobile communications device as claimed in
15 claim 8, wherein the virtual reference cell timing is defined with reference to the active cell whose downlink transmission timing most closely corresponds to the downlink transmission timing of the previous reference cell.

20

13. A mobile communications device as claimed
in claim 8, wherein the virtual reference cell timing
is defined with reference to the active cell from which
the strongest signal is being received.

25

14. A mobile communications device as claimed in
claim 8, wherein the virtual reference cell timing is
defined with reference to the average timing of all of
the cells in the active set.

30

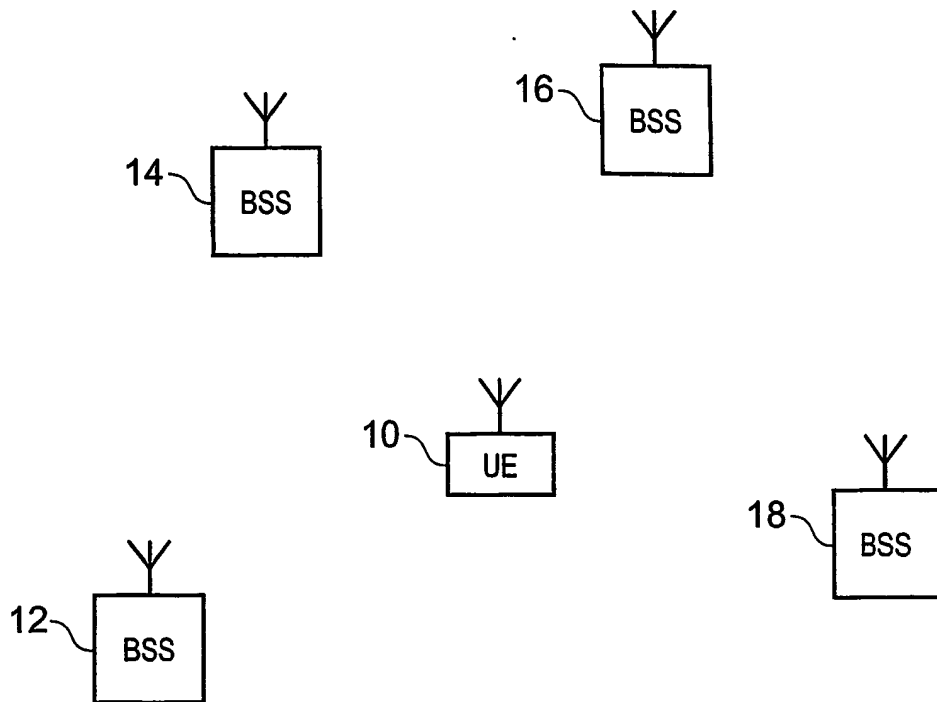


Fig. 1


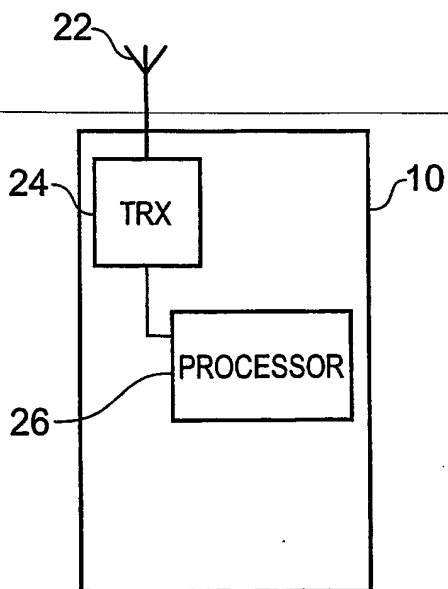


Fig. 2

2/3

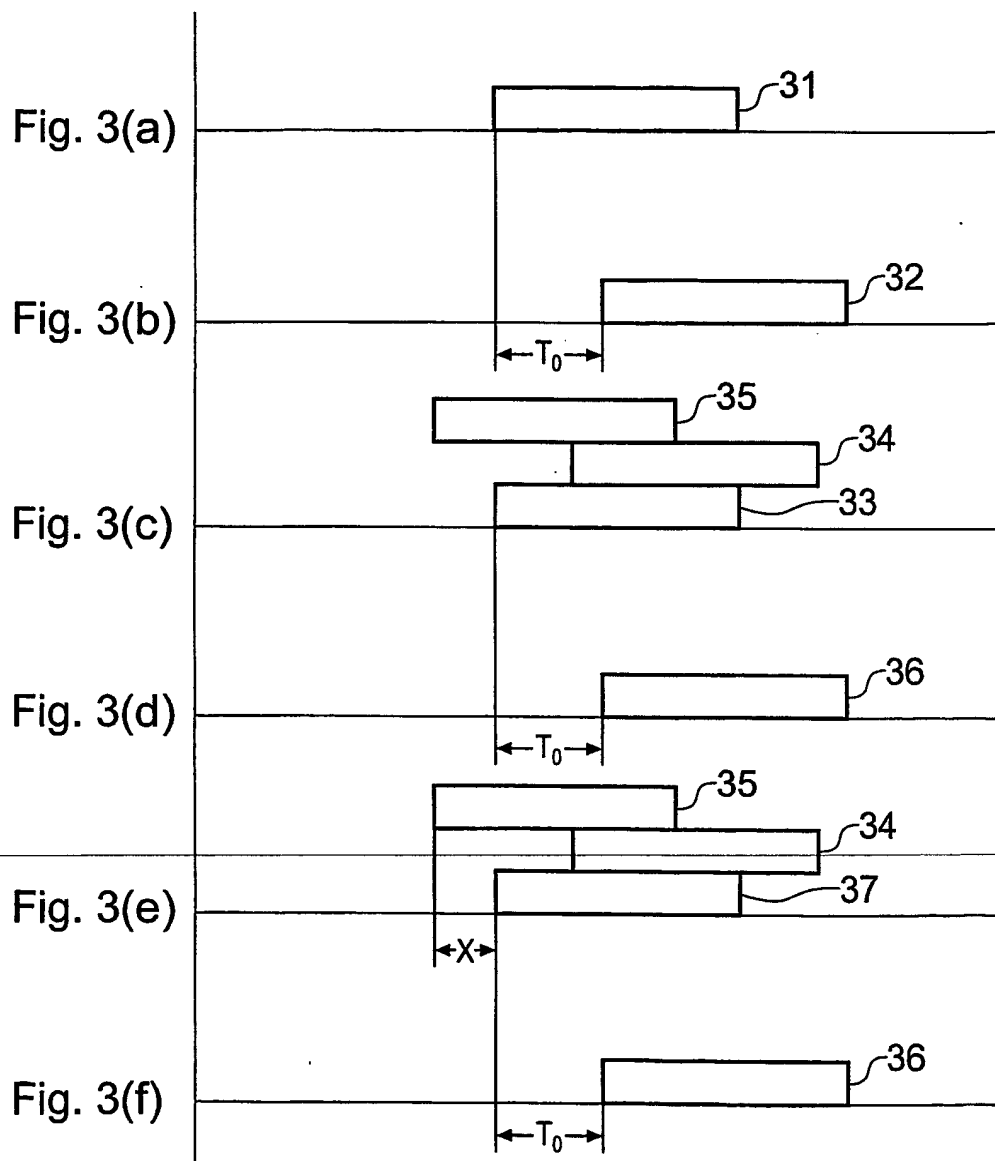

SUBSTITUTE SHEET (RULE 26)

10/507971

3/3

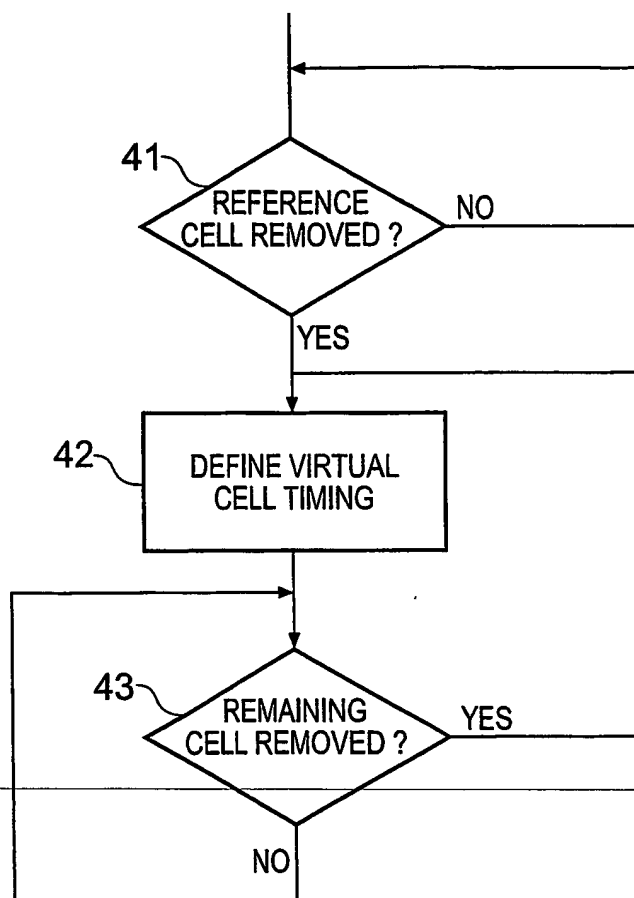


Fig. 4

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/03057

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/38 H04B7/26 H04B7/212

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02 07345 A (SAMSUNG ELECTRONICS CO LTD) 24 January 2002 (2002-01-24) the whole document	1-14
A	WO 02 15624 A (SIEMENS AG ;OESTREICH STEFAN (DE)) 21 February 2002 (2002-02-21) the whole document	1-14
A	US 5 640 679 A (LUNDQVIST NILS PATRIK ET AL) 17 June 1997 (1997-06-17) the whole document	1-14
A	US 6 208 871 B1 (KRZYSTYNIAC MICHAEL ANTHONY ET AL) 27 March 2001 (2001-03-27) the whole document	1-14

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

9 May 2003

Date of mailing of the international search report

22/05/2003

Name and mailing address of the ISA

European Patent Office, P.O. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Quaranta, L

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/03057

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0207345	A	24-01-2002	AU 7111801 A CA 2385550 A1 CN 1386336 T EP 1212854 A1 WO 0207345 A1 KR 2002008073 A US 2002051431 A1	30-01-2002 24-01-2002 18-12-2002 12-06-2002 24-01-2002 29-01-2002 02-05-2002
WO 0215624	A	21-02-2002	DE 10039967 A1 WO 0215624 A1	25-04-2002 21-02-2002
US 5640679	A	17-06-1997	AU 672294 B2 AU 6223394 A CA 2133734 A1 CN 1103242 A ,B DE 69418547 D1 DE 69418547 T2 DK 638215 T3 EP 0638215 A1 ES 2133545 T3 FI 945120 A GR 3030895 T3 HK 1014305 A1 JP 7507433 T NZ 262526 A RU 2120697 C1 WO 9421057 A1 SG 42906 A1	26-09-1996 26-09-1994 15-09-1994 31-05-1995 24-06-1999 16-09-1999 22-11-1999 15-02-1995 16-09-1999 31-10-1994 30-11-1999 05-10-2000 10-08-1995 26-07-1996 20-10-1998 15-09-1994 17-10-1997
US 6208871	B1	27-03-2001	BR 9908269 A CA 2320858 A1 CN 1318231 T EP 1095469 A1 JP 2002505542 T WO 9944306 A1	24-10-2000 02-09-1999 17-10-2001 02-05-2001 19-02-2002 02-09-1999

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.